

**PACIFIC ELECTRIC WINCHES**


**SINGLE and 3 PHASE**  
**Capacities: 200kg to 5000kg**

Precision engineered, ruggedly constructed and available in a range of single and three phase models suitable for many hoisting and pulling operations.

- High performance with low maintenance and adjustment free brakes.
- Brakes designed for both static and dynamic loading automatically apply in the event of power loss.
- Compact load sharing design of the heat treated planetary gear ensures quiet operation and long life.
- Low voltage (24v) push button control supplied as standard on three phase models.


**COMPLIES WITH AS1418.2**

| Model Code  | Capacity kg | Speed m/min | Motor kW | Voltage x phase | Wire rope ømm x m | Weight kg |
|-------------|-------------|-------------|----------|-----------------|-------------------|-----------|
| CP - 200    | 200         | 10 - 15     | 0.6      | 240 x 1         | 6 x 30            | 32        |
| CP - 250    | 250         | 10 - 15     | 0.75     | 240 x 1         | 6 x 30            | 34        |
| CP - 300    | 300         | 10 - 15     | 1.15     | 240 x 1         | 6 x 30            | 37        |
| CWG - 10077 | 300         | 12 - 17     | 1.5      | 240 x 1         | 7 x 40            | 44        |
| CWG - 30075 | 300         | 10 - 15     | 0.75     | 415 x 3         | 6 x 30            | 34        |
| CWG - 10151 | 400         | 12 - 18     | 1.5      | 250 x 1         | 9 x 60            | 120       |
| CWG - 30151 | 500         | 12 - 18     | 1.5      | 415 x 3         | 9 x 60            | 120       |
| CWG - 30265 | 650         | 12 - 18     | 2.2      | 415 x 3         | 9 x 60            | 160       |
| CWG - 30375 | 900         | 13 - 20.6   | 4        | 415 x 3         | 10 x 60           | 220       |
| CWG - 30565 | 1100        | 14 - 25     | 5.5      | 415 x 3         | 12 x 100          | 290       |
| CWG - 30750 | 2200        | 7 - 12      | 5.5      | 415 x 3         | 16 x 100          | 450       |
| CWG - 31500 | 3500        | 6.3 - 8     | 5.5      | 415 x 3         | 18 x 120          | 860       |
| CWG - 34000 | 5000        | 8 - 11.2    | 11       | 415 x 3         | 22.4 x 150        | 1500      |

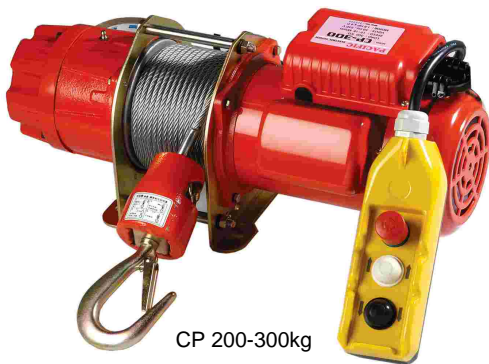

CP 200-300kg

| Model Code  | A mm      | B mm | C mm | D mm | E mm | F mm |
|-------------|-----------|------|------|------|------|------|
| CP - 200    | 4 x ø10.5 | 142  | 142  | 548  | 210  | 241  |
| CP - 250    | 4 x ø10.5 | 142  | 142  | 548  | 210  | 241  |
| CP - 300    | 4 x ø10.5 | 142  | 142  | 548  | 210  | 241  |
| CWG - 10077 | 4 x ø13.5 | 197  | 156  | 630  | 240  | 300  |
| CWG - 30075 | 4 x ø10.5 | 142  | 142  | 548  | 210  | 241  |
| CWG - 10151 | 4 x ø16   | 400  | 325  | 922  | 367  | 425  |
| CWG - 30151 | 4 x ø16   | 400  | 325  | 922  | 367  | 425  |
| CWG - 30265 | 4 x ø16   | 400  | 325  | 940  | 367  | 425  |
| CWG - 30375 | 4 x ø19   | 500  | 370  | 1009 | 400  | 445  |
| CWG - 30565 | 4 x ø19   | 620  | 495  | 1120 | 470  | 520  |
| CWG - 30750 | 4 x ø22   | 600  | 499  | 1246 | 565  | 658  |
| CWG - 31500 | 8 x ø30   | 847  | 680  | 1439 | 740  | 860  |
| CWG - 34000 | 8 x ø32   | 920  | 680  | 1860 | 740  | 905  |

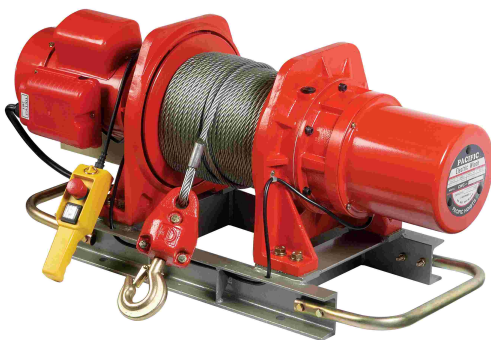

CWG 300-650kg

