


**GRAB HOOK - EYE TYPE**




MAX8 Eye Type Grab Hooks provide the flexibility to shorten a chain sling or be used for back-hooking. MAX8 Eye Type Grab Hooks are designed for easy attachment to Chain Connectors and feature support lugs which provide no reduction of the working load limit.

- Manufactured from G80 alloy steel with a safety factor of 4:1
- Test Certificates are available on request
- Conforms to AS3776

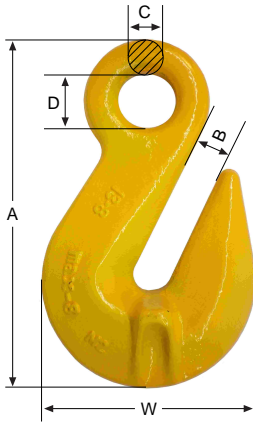

PRODUCT CODE	CHAIN SIZE mm	WLL tonne	WEIGHT KG	DIMENSIONS mm				
				A	B	C	D	W
GRA06EMAX	6	1.12	0.25	76.5	8	8	13	45
GRA08EMAX	8	2	0.4	106	11	9.5	16	63
GRA10EMAX	10	3.15	0.6	126	13	12	20	79
GRA13EMAX	13	5.3	1.2	156	16	15	25	100
GRA16EMAX	16	8	2.7	193	20	19	28.5	122
GRA20EMAX	20	12.5	4.3	226	25	20	36	150.5
GRA22EMAX	22	15	6.4	269	26	27	42	169
GRA26EMAX	26	21.2	9.8	298	30	32	45	175
GRA32EMAX	32	31.5	19.4	361	38	38	57	189

**GRAB HOOK - CLEVIS TYPE**

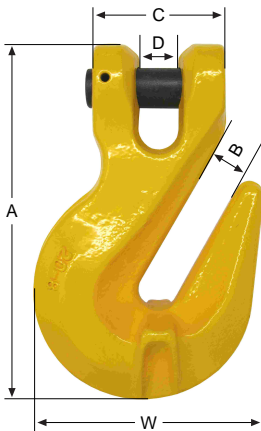

MAX8 Clevis Grab Hooks provide the flexibility to shorten a chain sling or can be used for back-hooking. MAX8 Clevis Grab Hooks are designed for easy attachment directly to the chain and feature supporting lugs which provide no reduction of the working load limit.

- Manufactured from G80 alloy steel with a safety factor of 4:1
- Test Certificates are available on request
- Conforms to AS3776



PRODUCT CODE	CHAIN SIZE mm	WLL tonne	WEIGHT KG	DIMENSIONS mm				
				A	B	C	D	W
GRA06CMAX	6	1.12	0.28	78	8	32	7.5	41
GRA08CMAX	8	2	0.3	108	11	36	9	57
GRA10CMAX	10	3.15	0.95	127	13	46	12	70
GRA13CMAX	13	5.3	1.97	163	16	59	15	89
GRA16CMAX	16	8	3.45	204	20	70	17.5	109
GRA20CMAX	20	12.5	5.3	243	23	80	23	130
GRA22CMAX	22	15	7.8	280	26	98	25.5	151
GRA26CMAX	26	21.2	14.5	309	30	110	30	175

**CLEVIS SHORTENING CLUTCH**



MAX8 Clevis Shortening Clutches provide the flexibility to shorten a chain sling. Designed for easy attachment directly to the chain, they provide no reduction of the working load limit.



PRODUCT CODE	SIZE	WLL tonne	WEIGHT KG/unit	DIMENSIONS mm				
				A	B	C	E	L
CLU06MAX	6	1.12	0.17	7.5	7.5	33	26	73.5
CLU08MAX	7-8	2	0.41	9.5	9.5	45	36	101
CLU10MAX	10	3.15	0.97	13	13	55	48	138
CLU13MAX	13	5.3	2.01	18	18	75	59	177
CLU16MAX	16	8	3.32	21	21	93	73	220
CLU20MAX	20	12.5	6.2	22	22	99	78	238
CLU22MAX	22	15	8.5	25.5	25.5	118	98	295