


TELESCOPIC LIFTING/SPREADER BEAM




- Available in fixed lengths or telescopic
- Available as plain spreader or combination lifting beam
- Manufactured in accordance with AS4991
- Other capacities and lengths available on request



8.6tonne Maximum Working Load Limit	LENGTH (mtr)	2.1	2.6	3.1	3.6
	WLL as LIFTING (t)	1.3	1.1	0.9	0.8
	WLL as SPREADER (t)	8.6	8.6	8.6	8.6

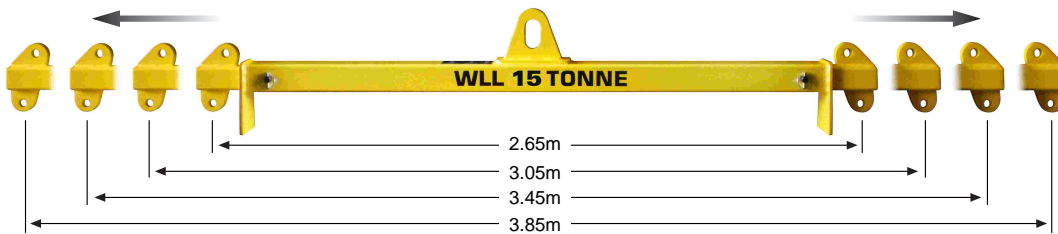

15tonne Maximum Working Load Limit	LENGTH (mtr)	2.65	3.05	3.45	3.85
	WLL as LIFTING (t)	3.1	2.7	2.4	2.0
	WLL as SPREADER (t)	15	15	15	15

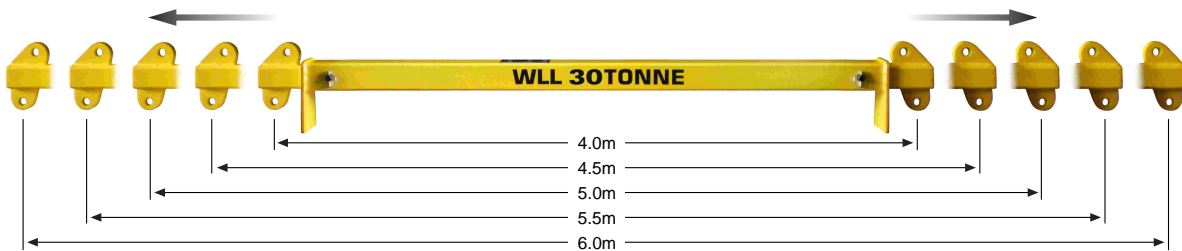

30tonne Maximum Working Load Limit	LENGTH (mtr)	4.0	4.5	5.0	5.5	6.0
	WLL as LIFTING (t)*	6.00	5.25	4.50	4.25	4.00
	WLL as SPREADER (t)	30	30	30	30	30

\* Capacity when used as Lift Beam when fitted with optional centre top lug

WE CAN ALSO MANUFACTURE ITEMS TO SUIT YOUR SPECIAL REQUIREMENTS