


GRADE 80 ALLOY CHAIN



MAX8 Grade 80 (T) chain is designed for chain slings used for industrial applications. It is made from alloy steel, hardened and tempered, with a high resistance to impact and meets the requirements of AS2321.


- Available in sizes from 6mm to 32mm.
- Made from G80 alloy steel with a safety factor of 4:1
- Test Certificates available on request.



SUITABLE FOR LIFTING APPLICATIONS

PRODUCT CODE	SIZE	WLL	DIMENSIONS mm			WEIGHT
FULL DRUM or CUT LENGTH	mm	tonne	B	C	D	kg/mtr
CNA06MAX	6	1.1	21	18	6	0.84
CNA08MAX	8	2	28	24	8	1.41
CNA10MAX	10	3.2	35	30	10	2.21
CNA13MAX	13	5.3	46	39	13	3.76
CNA16MAX	16	8	57	48	16	5.64
CNA20MAX	20	12.5	70	60	20	7.78
CNA22MAX	22	15	78	66	22	10.64
CNA26MAX	26	21.2	91	78	26	14.8
CNA32MAX	32	31.5	115	96	32	21.6

CONNECTING LINK

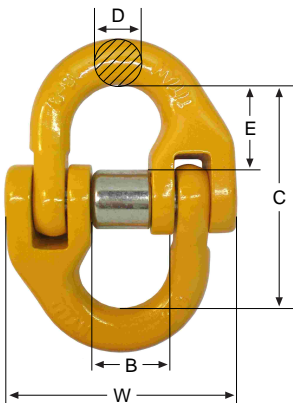

Connecting Links are generally used to connect Oblong Links, Chain, Hooks and other components of Chain Slings.

- Manufactured from G80 alloy steel, with a safety factor of 4:1.
- Test Certificates are available on request.
- Conforms to AS3776



PRODUCT CODE	CHAIN SIZE mm	WLL tonne	WEIGHT KG	DIMENSIONS mm				
				B	C	D	E	W
HAM06	6	1.12	0.08	15	42	7	18	43
HAM08	8	2	0.146	18	60.5	8.5	23.5	55
HAM10	10	3.15	0.3	25	68	11.5	27	69
HAM13	13	5.3	0.7	29	87	15	32	83
HAM16	16	8	1.3	34.5	108.4	19.8	41	102
HAM20	20	12.5	2.1	41	121.5	24	52.5	117
HAM22	22	15	3.2	48	141.5	26	62	143
HAM26	26	21.2	4.5	57.5	158	30	64	163
HAM32	32	31.5	9	67	205	37	86	199