
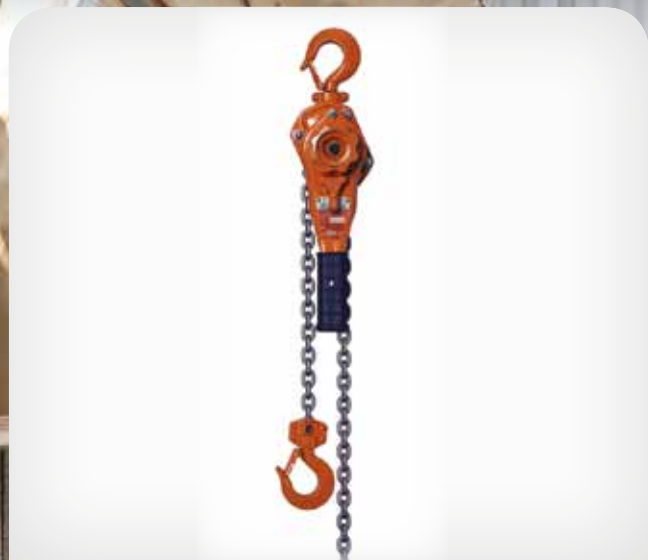


KITO L5 SERIES LEVER HOIST

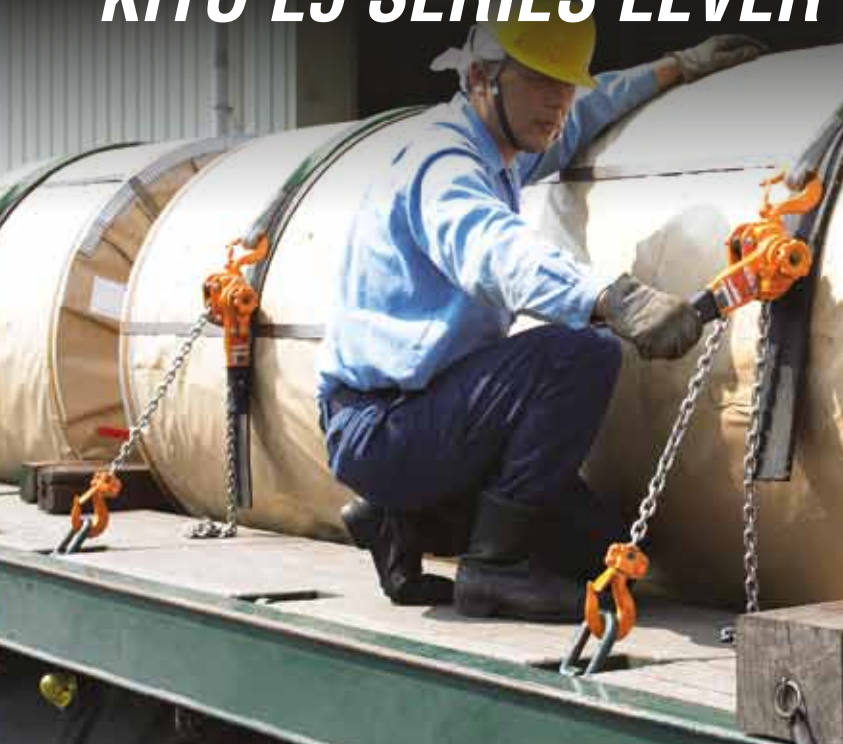

Applications

- ✓ Fabrication, construction, engineering, power transmission
- ✓ Ideal for lifting, lowering, positioning, tensioning of loads

Compact KITO L5 Lever Hoists allow maximum mechanical efficiency with minimum effort.

Capacity: 800kg – 9T

Features and Benefits

- ✓ Unique patented 'Free Wheeling Hub' mechanism.
- ✓ Smaller, lighter, high grade (solid), alloy steel frame construction.
- ✓ Double brake pads with four braking surfaces.
- ✓ Capacities 0.8T – 9T.
- ✓ Low headroom design.
- ✓ Double Pawl & Double Spring Assemblies.
- ✓ KITO manufactured Nickel plated grade 100 load chain.
- ✓ Needle and Ball roller bearings allow maximum mechanical efficiency with minimum effort.
- ✓ Also available with overload limiter which prevents hoist overload and protects the operator

Optional Fixture



Kito Clip - a fixture for wire rope developed for combined use with a Lever Block or Chain Block. It's easy to use and economical.

Australian Standard: AS 1418.2

KITO L5 Series Lever Hoists

Specifications



Capacity	Part No. (1.5m Lift)	Part No. (3m Lift)	Headroom (mm)	Lever Length (mm)	Load Chain Dia (mm) x fall	Weight (kg)	Load Chain Dia x Pitch (mm)	Load Chain Part No.
L5 Lever Block								
800kg	44202	45890	280	245	5.6 x 1	5.7	5.6 x 15.7	44278
1 tonne	44203	62575	300	245	5.6 x 1	5.9	5.6 x 15.7	44278
1.6 tonne	44204	45891	335	265	7.1 x 1	8.0	7.1 x 19.9	44279
2.5 tonne	44205	61917	375	265	8.8 x 1	11.2	8.8 x 24.6	44280
3.2 tonne	44206	45892	395	415	10.0 x 1	15.0	10 x 28.0	44281
6.3 tonne	44207	45893	540	415	10.0 x 2	26.0	10 x 28.0	44281
9 tonne	44208	61498	680	415	10.0 x 3	40.0	10 x 28.0	44281
L5 Lever Block with overload limiter								
800kg	63090	64934	280	245	5.6 x 1	6.0	5.6 x 15.7	44278
1 tonne	63091	64935	300	245	5.6 x 1	6.2	5.6 x 15.7	44278
1.6 tonne	63092	64936	335	265	7.1 x 1	8.4	7.1 x 19.9	44279
2.5 tonne	63093	64937	375	265	8.8 x 1	11.6	8.8 x 24.6	44280
3.2 tonne	63094	64938	395	415	10 x 1	15.2	10 x 28.0	44281
6.3 tonne	63095	64939	540	415	10 x 2	26.2	10 x 28.0	44281
9 tonne	63096	64940	680	415	10 x 3	40.2	10 x 28.0	44281

*Weights shown for Lever Hoists are for standard 1.5 metre lift models.

KITO CLIP



Features:

- Can be fixed easily in any location along a wire.
- Wire is firmly gripped by simply inserting the wire into the frame and pulling.
- Features a special groove that protects the wire.
- Economical and versatile.

Specifications and Dimensions

Rated load (W.L.L.) (t)	Code	Applicable wire rope diameter (mm)	Mass (Net weight) (kg)	Cam dimensions (mm)			KITO PWB Part No.
				a	b	c	
0.75	KC100	8 to 10	0.9	34	16	10.5	44663
1.5	KC140	12 to 14	2.0	42	19	15.5	43332
3	KC200	16 to 20	4.8	48	20	18	43333

*Kito Clip is not designed as a fixture for slinging.

KITOPWB

Premium Quality Products

For more information:

Call 1300 792 262
Visit www.kitopwb.com.au

Head Office & Manufacturing Plant

441 Grimshaw Street, Bundoora, VIC 3083
Tel: 1300 792 262 Fax: 03 9467 7290
Email: vicsales@kitopwb.com.au

QLD Office

1/119 Bandarra Street, Richlands, QLD 4077
Tel: 07 3375 1288 Fax: 07 3375 8241
Email: qldsales@kitopwb.com.au

NSW Office

98 Forrester Road, St Marys, NSW 2760
Tel: 02 8886 5200 Fax: 02 9673 8117
Email: nswsales@kitopwb.com.au

WA Office

13 Tacoma Circuit, Canning Vale, WA 6155
Tel: 08 9256 2499 Fax: 08 9256 1621
Email: wasales@kitopwb.com.au