



ALUMINIUM FERRULES

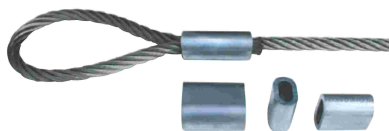

High quality aluminium ferrules made to DIN standard, used mainly for splicing wire rope to form an eye for slings, winch cables etc.

- Sizes available are from 1.5mm - 54mm
- Aluminium hydraulic machine press type

Note: Ferrule sizes differ for FC and IWRC wire rope during swaging
Confirm details when ordering

COMPLIES WITH DIN3039

PRODUCT CODE	DIN CODE	NET WEIGHT per 1000pcs (kg)	A	B	S	L
FEA02	2	0.375	2.2	4.4	0.85	7
FEA025	2.5	0.499	2.7	5.4	1.05	9
FEA03	3	0.843	3.3	6.6	1.25	11
FEA035	3.5	1.32	3.8	7.6	1.5	13
FEA04	4	1.81	4.4	8.8	1.7	14
FEA045	4.5	2.61	4.9	9.8	1.9	16
FEA05	5	3.57	5.5	11	2.1	18
FEA06	6	5.86	6.6	13.2	2.5	21
FEA065	6.5	7.55	7.2	14.4	2.7	23
FEA08	8	13.7	8.8	17.6	3.3	28
FEA09	9	19.8	9.9	19.8	3.7	32
FEA10	10	26.4	10.9	21.8	4.1	35
FEA11	11	35.8	12.1	24.2	4.5	39
FEA12	12	45.8	13.2	26.4	4.9	42
FEA13	13	59.7	14.2	28.4	5.4	46
FEA14	14	73.5	15.3	30.6	5.8	49
FEA16	16	111	17.5	35	6.7	56
FEA18	18	156	19.6	39.2	7.6	63
FEA20	20	217	21.7	43.4	8.4	70
FEA22	22	292	24.3	48.6	9.2	77
FEA24	24	376	26.4	52.8	10	84
FEA26	26	481	28.5	57	10.9	91
FEA28	28	603	31	62	11.7	98
FEA30	30	739	33.1	66.2	12.5	105
FEA32	32	897	35.2	70.4	13.4	112
FEA34	34	1077	37.8	75.6	14.2	119
FEA36	36	1275	39.8	79.6	15	126
FEA38	38	1503	41.9	83.8	15.8	133
FEA40	40	1734	44	88	16.6	140
FEA42	42	2024	46.2	92.4	17.5	147
FEA44	44	2314	48.4	96.8	18.3	154
FEA46	46	2662	50.6	101.2	19.2	161
FEA48	48	3010	52.8	105.6	20	168
FEA52	52	3813	57.2	114	21.6	182
FEA54	54	4293	59.4	118	22.5	189