


SELF LOCKING HOOK - EYE TYPE




MAX8 Self Locking Eye Hook is a versatile design allowing easy connection to Connecting Links, Shackles and Wire Rope Slings. The hook will not open until the trigger on the back is pressed, but allows the hook to remain open until the load is engaged.

- Manufactured from G80 alloy steel with a safety factor of 4:1
- Test Certificates available on request (Conforms to AS3776)
- Spare trigger kits are available

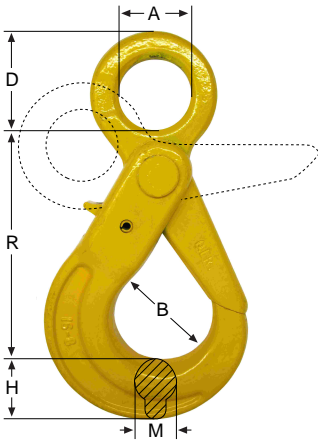

PRODUCT CODE	CHAIN SIZE mm	WLL tonne	WEIGHT KG	DIMENSIONS mm					
				A	B	D	R	H	M
LATCHLOK06EMAX	6	1.1	0.5	22	34	10.5	110.5	20	15
LATCHLOK08EMAX	8	2	0.8	25	46	12	136	24	20
LATCHLOK10EMAX	10	3.15	1.5	32	58	13	169	28	26
LATCHLOK13EMAX	13	5.3	2.8	40	69	16.5	208	40.5	32.5
LATCHLOK16EMAX	16	8	5.4	50	86	20	254.5	50.5	41
LATCHLOK20EMAX	20	12.5	10	61	92	26.5	290	62	50
LATCHLOK22EMAX	22	15	13.4	72	98	30	320	65	52
LATCHLOK26EMAX	26	21.2	18.5	80	110	34.3	362	75	60
LATCHLOK32EMAX	32	31.5	44.5	105	166	45	472	97	79.5

SELF LOCKING HOOK - CLEVIS TYPE

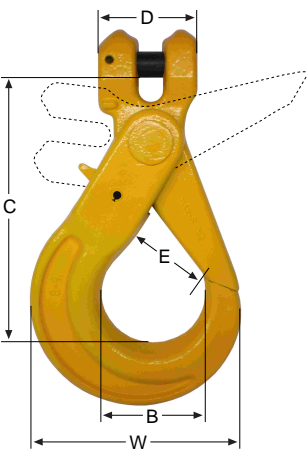


MAX8 Self Locking Clevis Hook will not open until the trigger on the back is pressed, but allows the hook to remain open until the load is engaged. The clevis feature allows quick and easy connection to the chain sling.

- Manufactured from G80 alloy steel with a safety factor of 4:1
- Test Certificates available on request (Conforms to AS3776)
- Spare trigger kits are available



PRODUCT CODE	CHAIN SIZE mm	WLL tonne	WEIGHT KG	DIMENSIONS mm				
				B	C	D	E	W
LATCHLOK06CMAX	6	1.1	0.4	34	96	32	28	69
LATCHLOK08CMAX	8	2	0.7	46	118.5	36	36	88
LATCHLOK10CMAX	10	3.15	1.5	58	144	46	45	107
LATCHLOK13CMAX	13	5.3	2.7	69	181.5	59	50	138
LATCHLOK16CMAX	16	8	5.6	86	216	70	60	182
LATCHLOK20CMAX	20	12.5	10.5	92	238	81	72	204
LATCHLOK22CMAX	22	15	13.8	98	276	98	78	205
LATCHLOK26CMAX	26	21.2	18.2	110	311	118	106	240

WELD ON EXCAVATOR HOOK

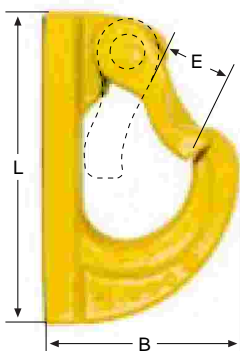

MAX8 Weld on Excavator Hooks are a versatile hook for lifting and spreader beams and as a fixed anchor point in general lifting applications.

- Manufactured from G80 alloy steel with a safety factor of 4:1
- Test Certificates available on request (Conforms to AS3776)
- Welding instructions supplied with each unit



PRODUCT CODE	CHAIN SIZE (mm)	WLL tonne	WEIGHT KG/unit	DIMENSIONS mm		
				B	E	L
EXC1T	6	1.1	0.35	53	18	87
EXC2T	8	2.0	0.55	63.5	26	112
EXC3T	10	3.2	0.87	75	30	127.5
EXC5T	13	5.3	1.75	92.5	35	160
EXC8T	16	8.0	3.0	106	40	180