

**RIGGING SCREWS**


Rigging Screws are used to provide a means for length adjustment and tensioning. They are used with guys for masts, towers, tall structures and engineering applications. Their elongated eye or clevis end fittings allow easy connection to shackles and wire rope assemblies. The enclosed section of the body provides a reservoir for lubricant to protect the threads from corrosion, making them ideal for permanent outdoor use or in a marine environment.



**RIGGING SCREW  
CLEVIS & CLEVIS**

Metric - Grades L, P & S

(Units shown in mm)

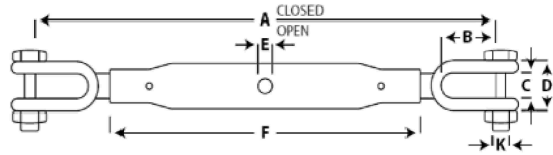


NOMINAL SIZE	A CLOSED	A OPEN	B	C	D	E	F	K	Grade L WLL (t)	Grade P WLL (t)	Grade S WLL (t)
M10	265	395	30	14	30	8.5	180	10	0.30	0.60	0.80
M12	340	525	36	15	35	8.5	230	10	0.50	1.0	1.2
M16	360	535	45	20	40	9.0	230	12	0.75	1.6	2.0
M20	390	555	55	22	46	10.5	230	16	1.25	2.5	3.2
M24	555	740	59	30	58	13.0	360	20	2.50	4.0	5.0
M33	628	904	80	38	75	14.0	380	24	5.0	8.0	10.0



**RIGGING SCREW  
CLEVIS & EYE**

Metric - Grades L, P & S

(Units shown in mm)

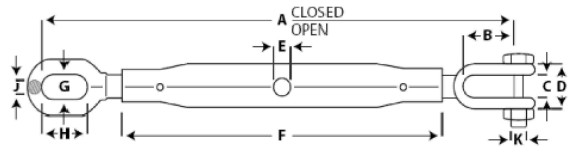


NOMINAL SIZE	A CLOSED	A OPEN	B	C	D	E	F	G	H	J	K	Grade L WLL (t)	Grade P WLL (t)	Grade S WLL (t)
M10	260	385	30	14	30	8.5	180	11	21	7	10	0.30	0.60	0.80
M12	335	525	36	15	35	8.5	230	14	30	9	10	0.50	1.0	1.2
M16	355	535	45	20	40	9.0	230	17	36	12	12	0.75	1.6	2.0
M20	385	550	55	22	46	10.5	230	21	42	14	16	1.25	2.5	3.2
M24	555	735	59	30	58	13.0	360	25	51	17	20	2.50	4.0	5.0
M33	644	920	80	38	75	14.0	380	33	70	24	24	5.0	8.0	10.0



**RIGGING SCREW  
EYE & EYE**

Metric - Grades L, P & S

(Units shown in mm)

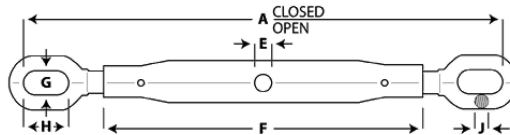

NOMINAL SIZE	A CLOSED	A OPEN	E	F	G	H	J	Grade L WLL (t)	Grade P WLL (t)	Grade S WLL (t)
M10	265	395	8.5	180	12	10	7	0.30	0.60	0.80
M12	340	525	8.5	230	15	10	9	0.50	1.0	1.2
M16	360	535	9.0	230	17	12	12	0.75	1.6	2.0
M20	390	555	10.5	230	21	16	12	1.25	2.5	3.2
M24	555	740	13.0	360	25	20	17	2.50	4.0	5.0
M33	628	904	14.0	380	33	24	24	5.0	8.0	10.0