

FEATURES:

- Heavy duty high efficiency ball bearings on all running surfaces
- Planetary gearing for maximum efficiency
- Cast steel foot mounting
- Fabricated steel drum
- Electromagnetic spring-applied fail safe brake
- Supplied on steel base plate ready to mount
- Enclosed drum flange to prevents ropes becoming trapped between drum and support castings quietrunning

WARNING:

Winches are not to be used for the moving of persons


WARRANTY:

Each new winch is guaranteed against defects in workmanship and material defects for a period of twelve months from date of purchase.

Wire ropes are not included under warranty.

STANDARD ACCESSORIES:

- Wire rope w/safety hook
- Switch cord 1.25mm²×3C×10m
- Power lead 14mm²×4C×1.5m
- Pendant switch K-82B
- Base plate

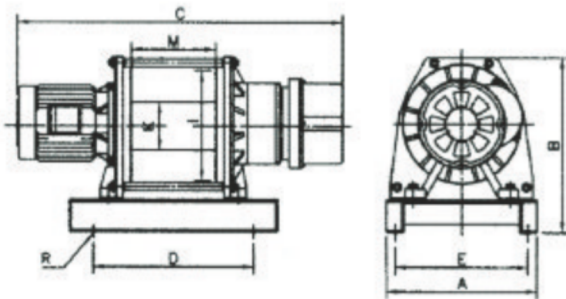

DIMENSIONS MM									
Model	Mounting bolt pattern			D	E	I	M	K	R
	A	B	C						
GG-1000	410	540	950	500	370	320	220	170	4-φ 18
GG-1100	470	570	1080	620	425	320	315	140	4-φ 18
GG-2000	570	680	1300	650	500	420	380	200	4-φ 25
GG-3500	740	830	1439	847	680	560	405	273	4-φ 30
GG-5000	740	830	1900	920	680	560	650	273	4-φ 30
GG-10000	1000	1155	2350	1600	900	800	850	360	4-φ 35

SPECIFICATIONS

Model	Lifting capacity top layer kg	Lifting speed m/min	Motor hp×poles	Lifting height m	Wire rope φ mm×m	Net weight kg	Gross weight kg
GG-1000	1000	18-23	5×4	58	10×60	210	240
GG-1100	1000	15-20	5×6	97	12×100	260	300
GG-2000	2000	12-19	7.5×4	97	14×100	310	350
GG-3500	3500	12-19	15×4	145	18×150	550	600
GG-5000	5000	9-16	20×4	190	22.4×200	1100	1300
GG-10000	10000	8-12	30×6	245	32×250	2800	2900