

< 220V-380V-440V×3ph AC >

FEATURES:

- Heavy duty high efficiency ball bearings on all running surfaces
- Planetary gearing for maximum efficiency
- Cast steel foot mounting
- Fabricated steel drum
- Electromagnetic spring-applied fail safe brake
- Supplied on steel base plate ready to mount
- Enclosed drum flange to prevents ropes becoming trapped between drum and support castings quietrunning



WARNING:

Winches are not to be used for the moving of persons


WARRANTY:

Each new winch is guaranteed against defects in workmanship and material defects for a period of twelve months from date of purchase.

Wire ropes are not included under warranty.

STANDARD ACCESSORIES:

- Wire rope w/safety hook
- Switch cord 1.25mm²×3C×10m
- Power lead 14mm²×4C×1.5m
- Pendant switch K-82B
- Base plate

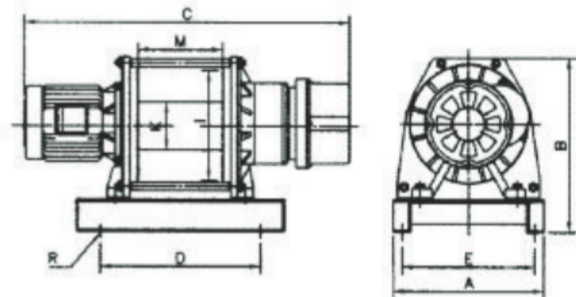

DIMENSIONS MM									
Model	Mounting bolt pattern			D	E	I	M	K	R
	A	B	C						
GG-1060	340	430	1000	400	336	280	240	110	4-φ16
GG-2060	410	540	950	500	370	320	220	170	4-φ18
GG-3000	570	680	1300	600	500	420	380	200	4-φ25

SPECIFICATIONS

Model	Lifting capacity top layer kg	Lifting speed m/min	Motor hp×poles	Lifting height m	Wire rope φ mm×m	Net weight kg	Gross weight kg
GG-1060	1000	11-17	3×6	49	10×50	160	185
GG-2060	2000	12-19	5×6	49	12×50	220	250
GG-3000	3000	12-19	10×4	97	16×100	410	450