




COMMERCIAL TURNBUCKLES

- Hook or eye end fitting for light duty tensioning of wire rope assemblies
- Sizes available are from 6mm - 24mm
- Zinc plated finish

NOT SUITABLE FOR LIFTING APPLICATIONS

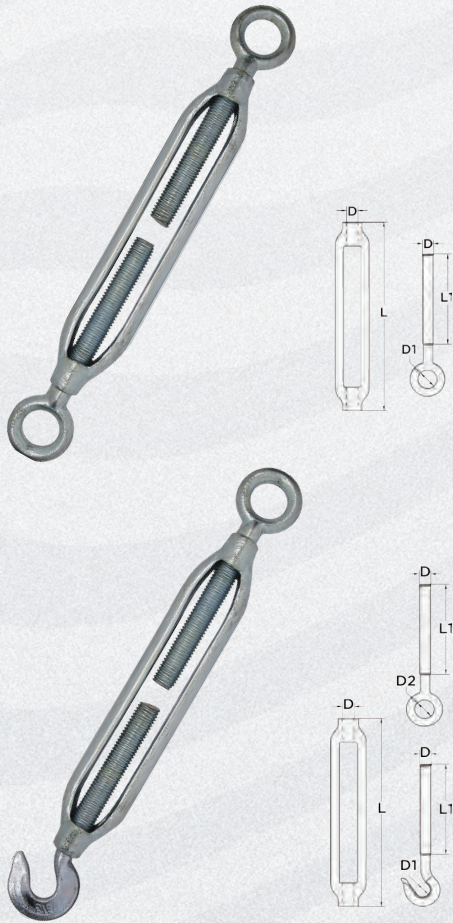

EYE - EYE

PART NO.	SIZE (mm)	NET WEIGHT (kg)	DIMENSIONS (mm)			
			L	L1	D	D1
TBKEE06	6	0.067	80	35	6	9
TBKEE08	8	0.13	105	50	8	11
TBKEE10	10	0.23	130	62	10	16
TBKEE12	12	0.35	140	65	12	18
TBKEE16	16	0.90	178	88	16	24
TBKEE20	20	1.43	215	110	20	28
TBKEE22	22	2.10	240	120	22	32
TBKEE24	24	2.62	255	135	24	36

HOOK - EYE


PART NO.	SIZE (mm)	NET WEIGHT (kg)	DIMENSIONS (mm)				
			L	L1	D	D1	D2
TBKHE06	6	0.052	80	35	6	8	9
TBKHE08	8	0.098	105	50	8	10	11
TBKHE10	10	0.226	130	62	10	16	16
TBKHE12	12	0.338	140	65	12	18	18
TBKHE16	16	0.989	178	88	16	24	24
TBKHE20	20	1.595	215	110	20	28	28
TBKHE22	22	2.18	240	120	22	32	32
TBKHE24	24	2.8	255	135	24	36	36

JAW - JAW TURNBUCKLE

Generally used for straight or in line tensioning in conjunction with wire rope and chain assemblies when heavy duty straining.

- Manufactured from high tensile material quenched and tempered hot dipped galvanized finish suitable for outdoors.
- Available in imperial sizing and jaw end fittings.
- Meets the design requirements of US Federal Specifications.
- Proof tested to 2 x WLL and Minimum Break Force is 5 x WLL.
- Test certificates available upon request.

NOT SUITABLE FOR LIFTING APPLICATIONS

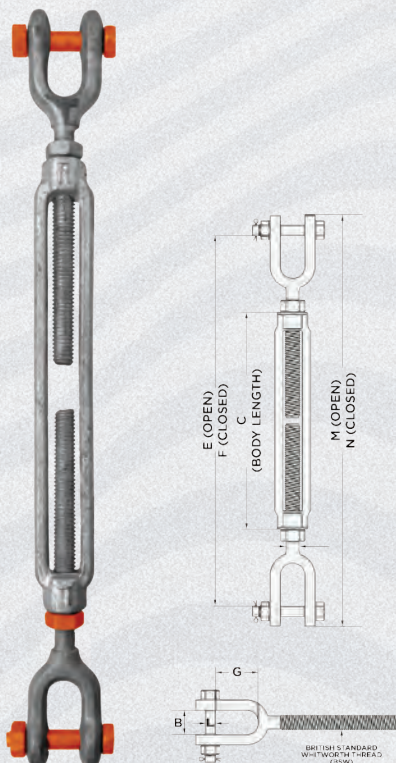

PART NO.	SIZE (in)	WLL (t)	NET WEIGHT (kg)	DIMENSIONS (mm)								
				A	B	C	E	F	G	M	N	L
TBS10	3/8	0.54	0.37	9.65	12.7	152	410	258	22.1	441	289	8
TBS12	1/2	1	0.71	12.7	16	152	470	292	26.9	508	330	10
TBS16	5/8	1.59	1.56	16	19	229	662	401	33.3	715	454	12.7
TBS20	3/4	2.96	2.98	19.1	23.4	305	851	508	32.1	917	574	16
TBS22	7/8	3.27	3.71	22.4	28.7	305	892	543	44.5	967	618	19
TBS25	1	4.54	5.53	25.4	30	305	933	577	52.5	1018	662	22.5
TBS32	1 1/4	6.89	9.36	31.8	44.5	305	1012	644	71.5	119	750	29
TBS38	1 1/2	9.71	13.9	38.1	52	305	1054	673	71.5	1181	800	35
TBS44	1 3/4	12.7	24.5	44.5	60	457	1356	899	86	1503	1046	41
TBS52	2	16.8	42.8	51	63.5	610	1766	1157	93.5	1949	1339	50.8
TBS64	2 1/2	27.2	75	63.5	73	610	1854	1244	113	2087	1478	57