


EYE BOLT DIN 580



Collar to be seated against threaded surface.
Working Load Limit (Tonnes) shown in table below.

SINGLE EYE BOLT PAIR OF EYE BOLTS

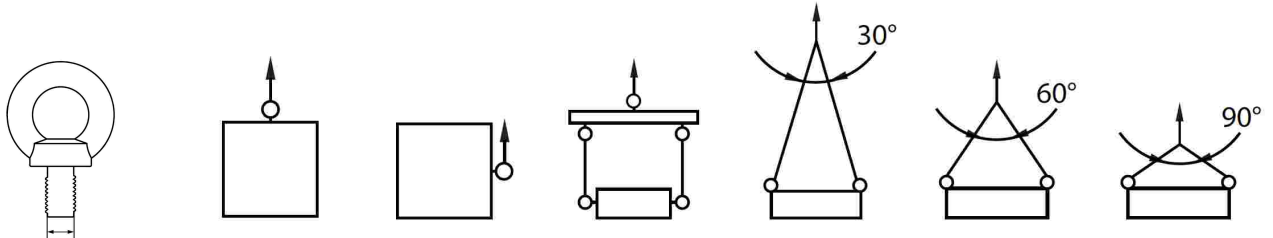

EYE BOLT SIZE	AXIAL	SIDE 90°	VERTICAL PAIR	30° ANGLE	60° ANGLE	90° ANGLE
M8	0.14	0.035	0.07	0.176	0.112	0.07
M10	0.23	0.058	0.115	0.29	0.184	0.115
M12	0.34	0.085	0.17	0.428	0.272	0.17
M16	0.70	0.175	0.35	0.882	0.56	0.35
M20	1.20	0.3	0.6	1.512	0.96	0.6
M22	1.50	0.375	0.75	1.89	1.2	0.75
M24	1.80	0.45	0.9	2.268	1.44	0.9
M27	2.50	0.625	1.25	3.15	2.0	1.25
M30	3.60	0.9	1.8	4.536	2.88	1.8
M36	5.10	1.275	2.55	6.426	4.08	2.55
M42	7.00	1.75	3.5	8.82	5.6	3.5
M48	8.60	2.15	4.3	10.836	6.88	4.3
M56	11.50	2.875	5.75	14.49	9.2	5.75

EYE BOLTS (LONG SHANK)

- Fully threaded long shank design
- Metric thread range from 10mm - 30mm
- Versatile for a multitude of purposes

NOMINAL SIZE	A mm	B mm	D mm	W mm
M10	10	178	15	33
M12	12	178	18	42
M16	16	178	23	52
M20	20	185	25	62
M24	24	178	35	82
M30	30	180	48	105

