


SLING HOOK - EYE TYPE




MAX8 Eye Type Sling Hooks are a general purpose unit suitable for most sling applications. The eye allows easy chain attachment using connecting links, with the cast springloaded latch providing added safety.

- Manufactured from G80 alloy steel with a safety factor of 4:1
- Test Certificates are available on request (Conforms to AS3776)

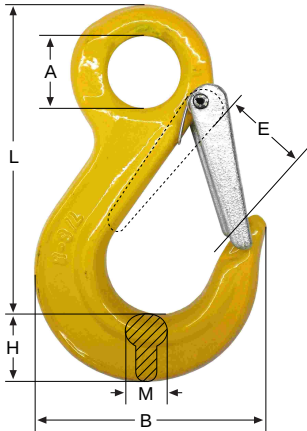

PRODUCT CODE	CHAIN SIZE mm	WLL tonne	WEIGHT KG	DIMENSIONS mm					
				A	B	E	H	M	L
SAFETYHOOK06EMAX	6	1.1	0.3	20	74	22	20.5	18	122
SAFETYHOOK08EMAX	8	2	0.5	25.5	83	26	23.5	18	138.5
SAFETYHOOK10EMAX	10	3.2	0.8	32.5	107	34	30	20	176.5
SAFETYHOOK13EMAX	13	5.3	1.9	39.5	134.3	41	37.5	29.5	218
SAFETYHOOK16EMAX	16	8	3.4	50	157.5	44	42.5	34	260
SAFETYHOOK20EMAX	20	12.8	5.3	60	189	52	53	44	310
SAFETYHOOK22EMAX	22	15	8.9	68	239	60	74	50	375.5
SAFETYHOOK26EMAX	26	21.2	13.4	75	245	71	83	63	412
SAFETYHOOK32EMAX	32	31.5	19	88	250	102	95	76	446

SLING HOOK - CLEVIS TYPE

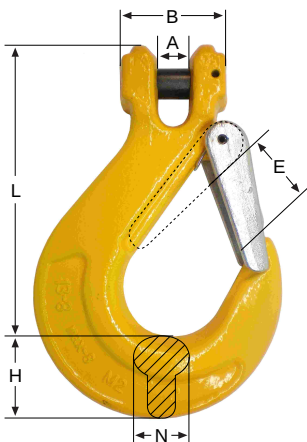


MAX8 Clevis Sling Hooks are a general purpose unit suitable for most sling applications. The clevis allows easy chain attachment with the cast springloaded latch providing added safety.

- Manufactured from G80 alloy steel with a safety factor of 4:1
- Test Certificates are available on request (Conforms to AS3776)



PRODUCT CODE	CHAIN SIZE mm	WLL tonne	WEIGHT KG	A	B	DIMENSIONS mm			
						E	N	H	L
SAFETYHOOK06CMAX	6	1.12	0.3	7.5	32	22	18	20.5	121
SAFETYHOOK08CMAX	8	2	0.5	9	36	25.5	18	23.5	137
SAFETYHOOK10CMAX	10	3.15	0.95	12	46	34	20	30	175.5
SAFETYHOOK13CMAX	13	5.3	1.9	15	59	41.5	29.5	37.5	210.5
SAFETYHOOK16CMAX	16	8	3.45	17.5	70	46	34	42.5	248.5
SAFETYHOOK20CMAX	20	12.5	6.5	23	80	52	45	54	309
SAFETYHOOK22CMAX	22	15	9.65	25.5	98	60	48	76	375.5

FOUNDRY HOOK - CLEVIS TYPE

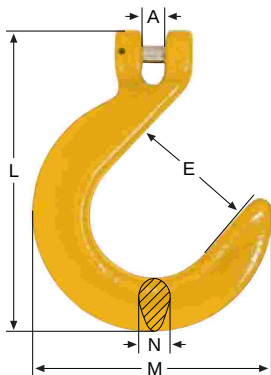

MAX8 Foundry Hook is a special purpose hook with a large mouth opening suitable for lifting pipes and other foundry applications. The clevis allows easy chain sling connection.

- Manufactured from G80 alloy steel with a safety factor of 4:1
- Test Certificates are available on request
- Conforms to AS3776



PRODUCT CODE	CHAIN SIZE mm	WLL tonne	WEIGHT KG	A	DIMENSIONS mm			
					E	M	N	L
FOUNDRY08CMAX	8	2	1.1	9.5	63.4	128	18	161
FOUNDRY10CMAX	10	3.15	2.5	13	76.9	156	32	199